

Tri-Lan 250 low loss coax 5mm wit

Art. nr: K1003

- low loss (as far as 20% lower than of H155)
- perfect matching (30 dB at 2.4GHz)
- high screening efficiency (90dB at 2.4GHz)




The cable guarantees not only efficient power transmission but also ensures savings on installation cost, in the process of migration from 2.4GHz to 5GHz band (it can work in both bands, so the cabling will not have to be replaced).

Specifications

Name	Tri-Lan 240		
Code	E1171		
			tolerance
Copper core			
Diameter	mm	1.4	+/-0.02
Mechanically foamed dielectric			
Outer diameter	mm	3.8	+/- 0.05
Shielding			
Al foil/Polyester/Al foil:	um	12/15/12	
Covering factor	%	100	
CuSn braid:		16x7x0.12	
Covering factor	%	80	
Outer diameter	mm	4.45	
Sheath			
Material		PE	
Outer diameter		6.10	+/-0.10
Color		black	
Electrical parameters			
Impedance	ohm	50	+/-2
Capacitance	pF/m	83	
Wave reduction factor	%	81	
Screening efficiency	dB	>90	
Resistance of the core	ohm/km	11.2	
Resistance of the shielding	ohm/km	12.4	
Other parameters			
Minimum bending radius	mm	30/60	
Weight	kg/km	47	
Working temperature	°C	-40 to +70	

Maximum transmitted power


Frequency [MHz]	Power [kW]
30	1.41
50	1.09
150	0.62
220	0.51
450	0.35
900	0.24
1500	0.19
1800	0.17
2000	0.16
2500	0.14
5800	0.09

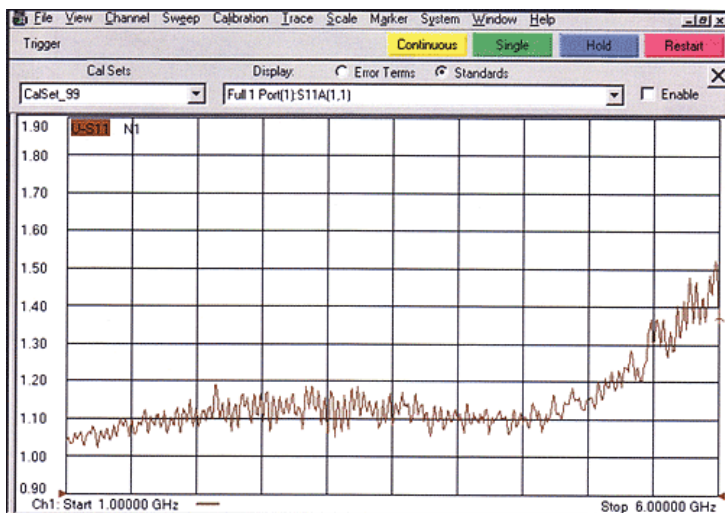

Cable loss at 20C

Frequency [MHz]	Attenuation [dB/100m]
30	4.2
50	5.4
150	9.2
220	11.2
450	16.2
900	23.3
1500	30.7
1800	33.9
2000	35.9
2500	40.6
5800	65.2

Matching characteristics (measurements performed in CLBT).

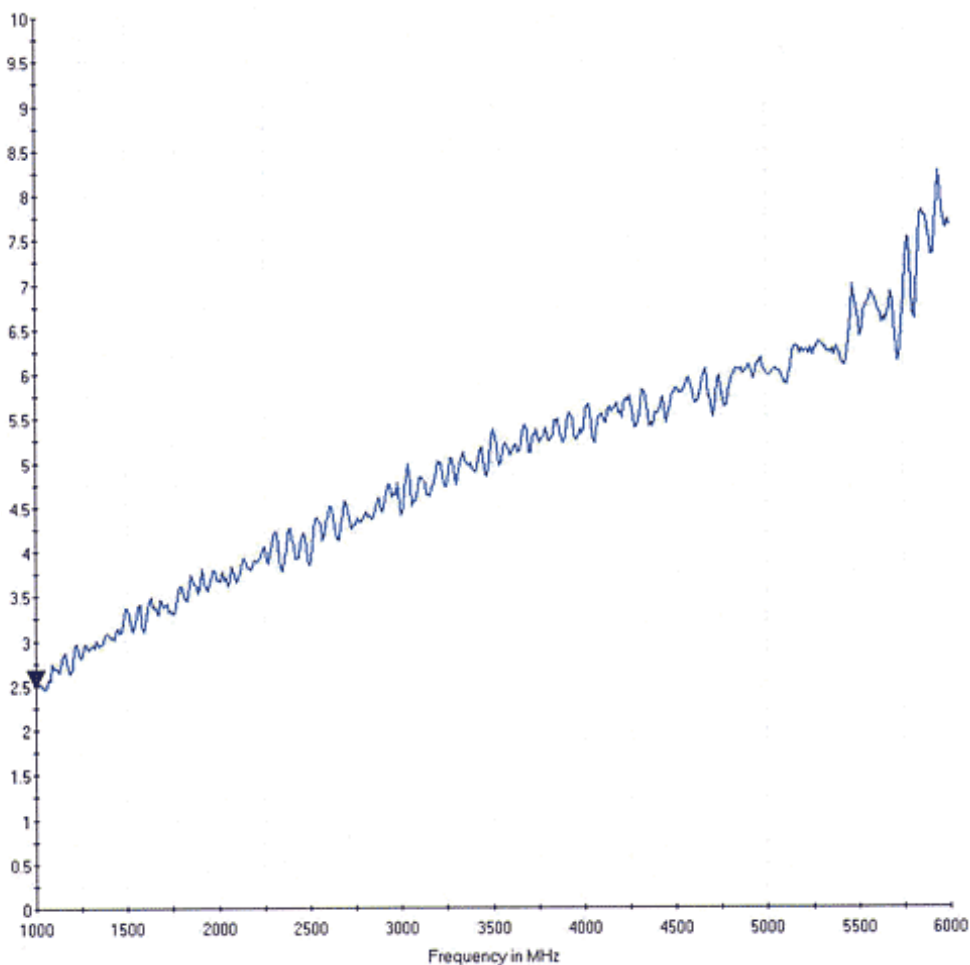

Loss versus frequency - 10m cable segment (measurements performed in CLBT).